



BOLT TYPE FOR CONCRETE POSTS

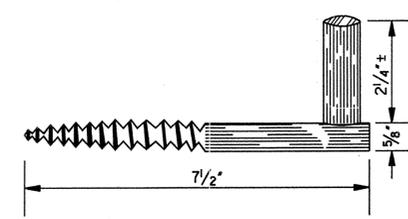


SCREW TYPE FOR WOOD POSTS

DETAILS OF SUGGESTED TYPES OF HOOK HINGE FOR GATES

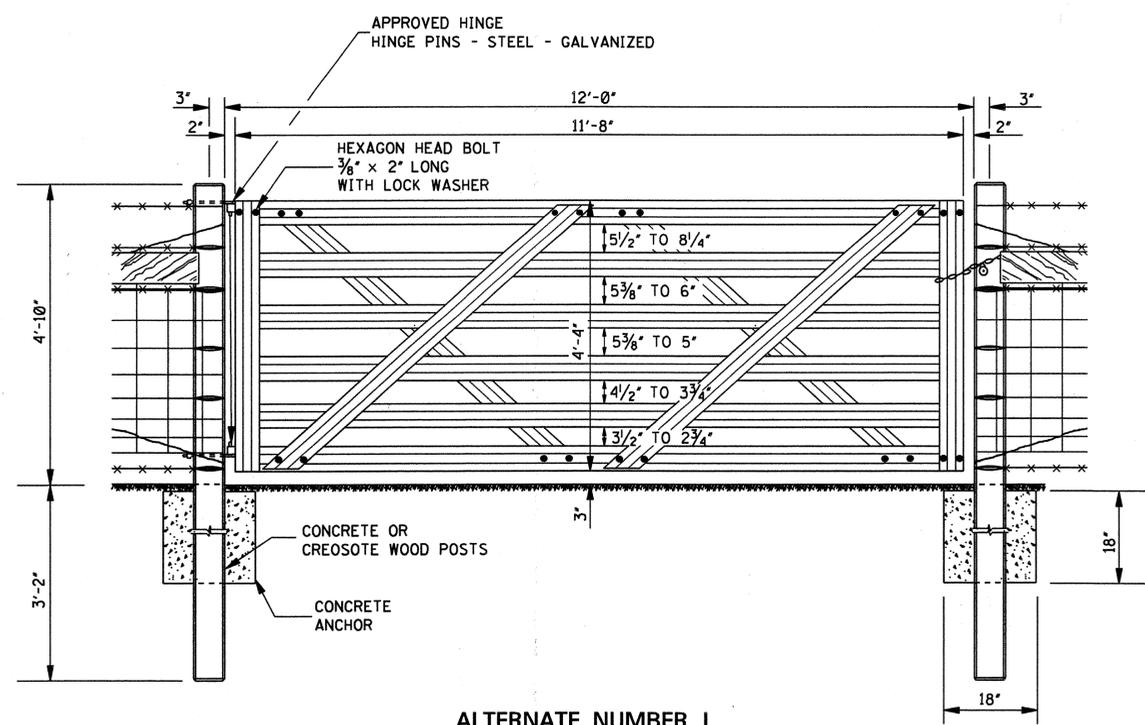


ALTERNATE NUMBER I


NOTE: GATE POSTS SIMILAR TO BRACE POSTS, BUT ADAPTED FOR USE WITH GATE HARDWARE.

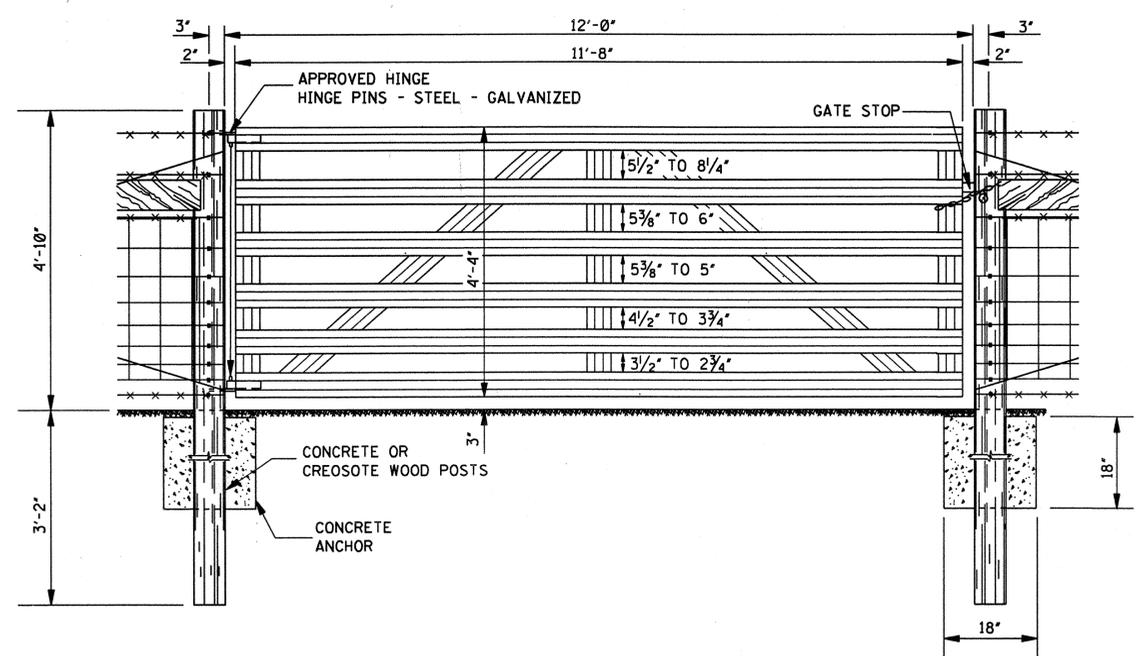

ALTERNATE NUMBER II

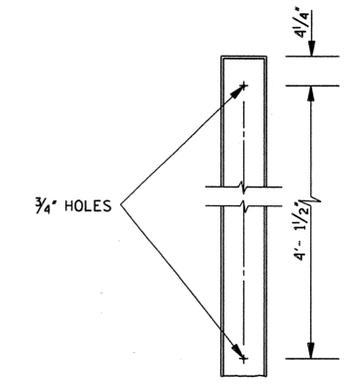

DETAIL OF BOLT HOLES IN CONCRETE POSTS

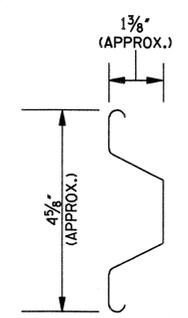

SECTION THRU SLAT

GENERAL NOTES:

1. EACH GATE TO INCLUDE ONE CHAIN 36' OF 3/8" HIGH TENSILE STRENGTH, CASE HARDENED AND ONE PADLOCK WITH KEY. ALL PADLOCKS TO BE KEYED ALIKE AND SHALL BE A MASTER NO. 5 OR EQUIVALENT (COST TO BE INCLUDED IN PRICE OF GATE).
2. EACH STRAND OF BARBED WIRE AND MESH WIRE SHALL BE SECURELY WRAPPED AND TIED AROUND GATE POSTS. IN ADDITION, ALL WIRE SHALL BE STAPLED TO WOOD POSTS.
3. THE DETAILS SHOWN SHOW SIX-HORIZONTAL SLATS, HOWEVER, DEPENDING UPON THE MANUFACTURER, FIVE-HORIZONTAL SLATS WILL BE ACCEPTED PROVIDED ALL OTHER CONTRACT REQUIREMENTS ARE MET.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION ROADWAY DESIGN DIVISION STANDARD PLAN		
<p>FENCE: ALUMINUM OR GALVANIZED FERROUS METAL GATE</p>		
DATE	ISSUE DATE: OCTOBER 1, 1998	WORKING NUMBER AG-1 SHEET NUMBER 167