


SECTION A-A


ELEVATION

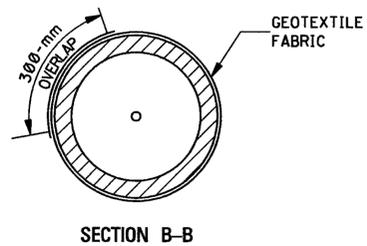


SECTION B-B

STACKED PIPE JOINTS

NOTE: EACH STACKED PIPE JOINT SHALL BE WRAPPED WITH 600 mm WIDE TYPE V GEOTEXTILE FABRIC (AASHTO M 288). THE FABRIC SHALL OVERLAP A MINIMUM OF 300 mm AT THE WRAP AND SHALL BE SECURED WITH STRING OR WIRE AS APPROVED BY THE ENGINEER PRIOR TO BACKFILLING. THE COST FOR THE MATERIALS AND LABOR SHALL BE ABSORBED.

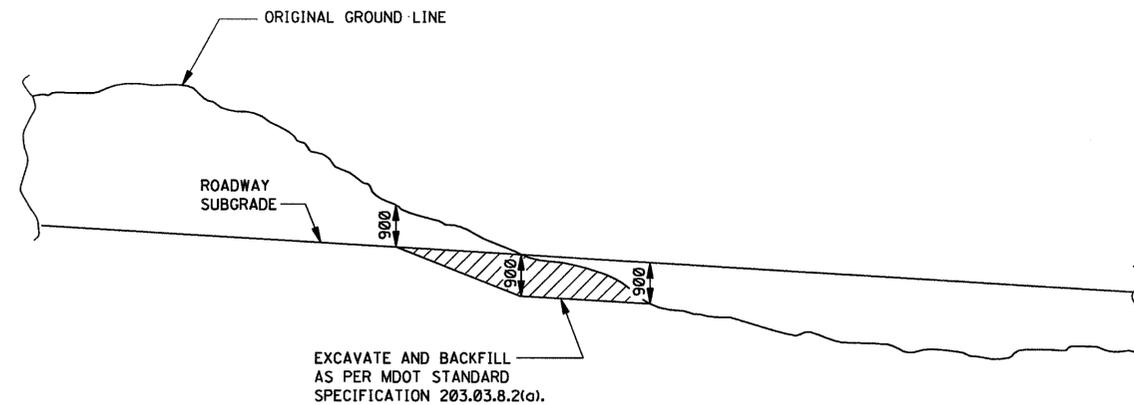

PROFILE SHOWING REQUIRED EXCAVATION AT GRADE POINTS

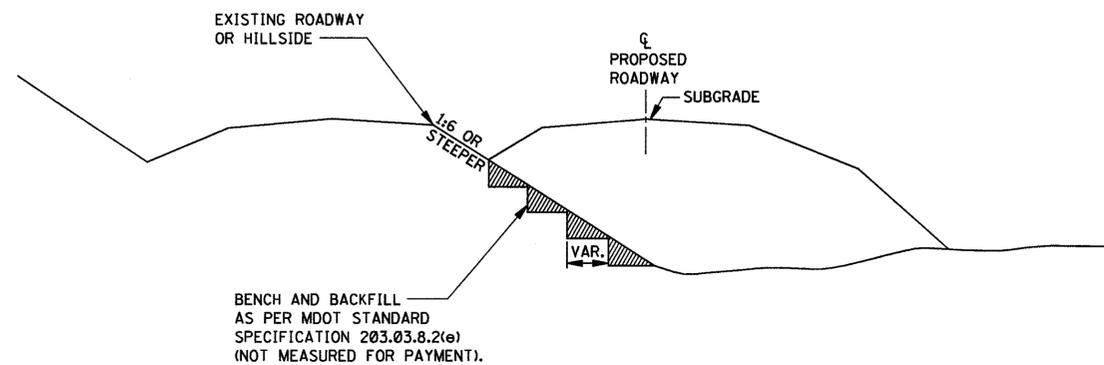

CROSS-SECTION SHOWING REQUIRED BENCHING UNDER EMBANKMENTS ON STEEP SLOPES

EXCAVATION AT GRADE POINTS

ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN

MISCELLANEOUS DETAIL SHEET

1. STACKED PIPE JOINTS
2. EXCAVATION AT GRADE POINTS



WORKING NUMBER
MDS-1

SHEET NUMBER
290

BY	
REVISION	
DATE	

ISSUE DATE: OCTOBER 1, 1998