

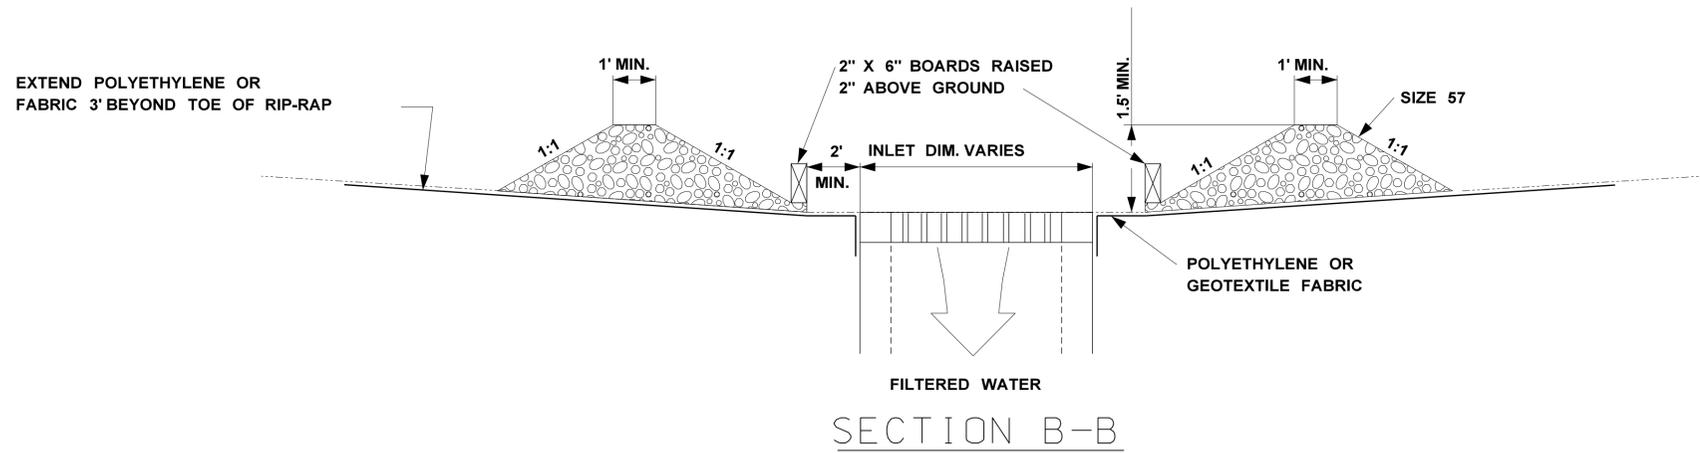
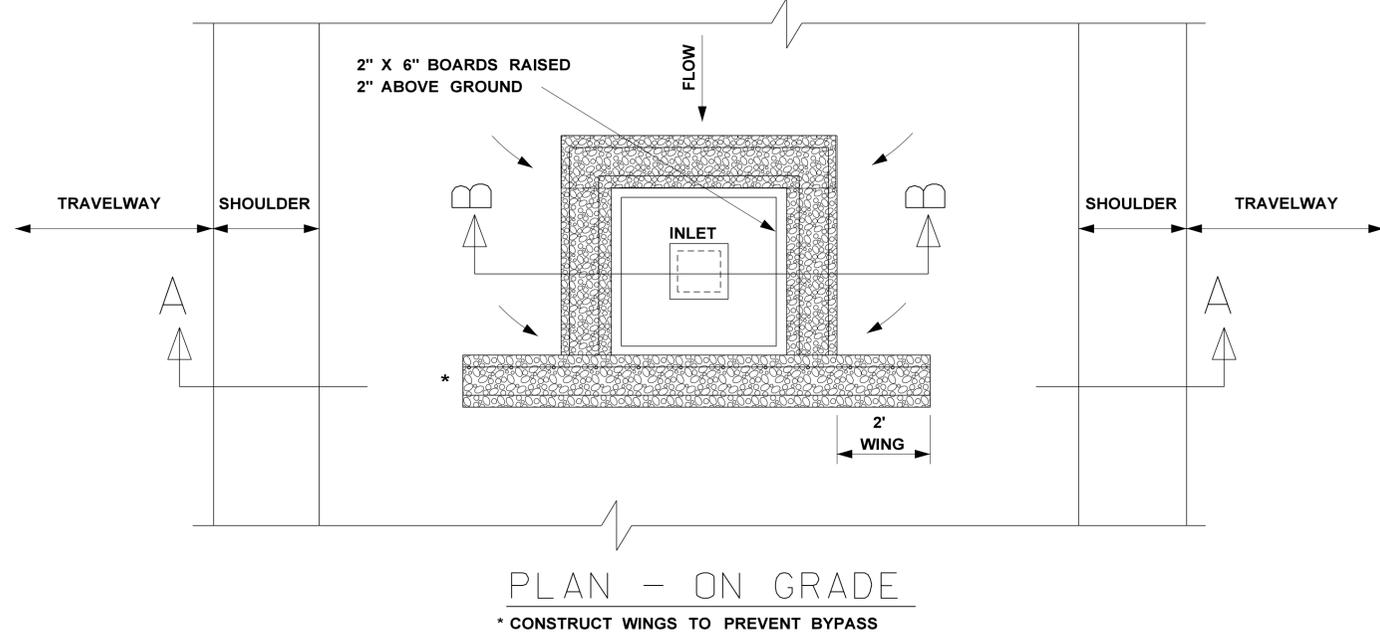


STATE	PROJECT NO.
MISS.	

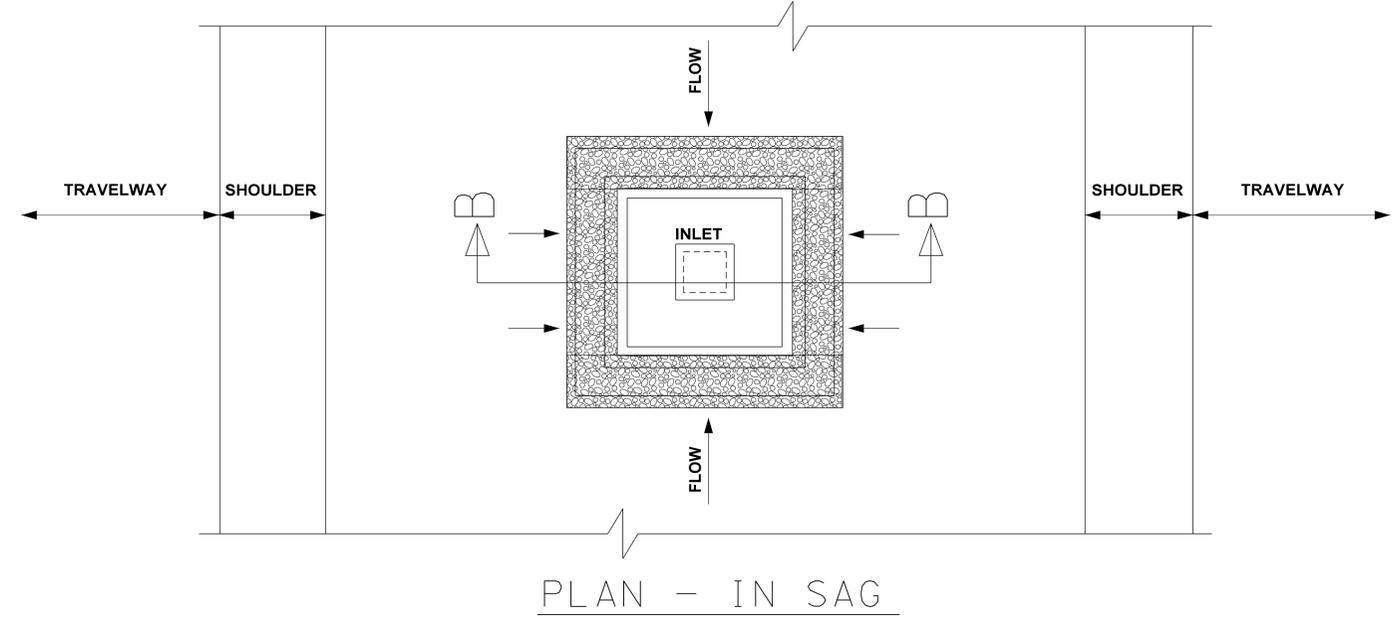

NOTES:

1. THE ELEVATION OF THE TOP OF THE REQUIRED STONE BERM SHALL BE A MINIMUM OF 1.5' ABOVE THE ELEVATION OF THE INLET WORKING POINT AND A MINIMUM OF 6" BELOW THE ELEVATION OF THE OUTSIDE EDGE OF THE INSIDE SHOULDER.
2. THIS COARSE AGGREGATE INLET PROTECTION SHALL NOT BE UTILIZED DURING STAGE 1 AND STAGE 2 INLET CONSTRUCTION. (SEE INLET PROTECTION TYPICAL APPLICATIONS AND DETAILS)
3. 2" X 6" BOARDS MAY BE REPLACED WITH WIRE MESH W/OPENINGS LESS THAN 1" X 1". COST IS ABSORBED.
4. THE COST OF POLYETHYLENE AND/OR FABRIC SHALL BE INCLUDED IN OTHER ITEMS BID.

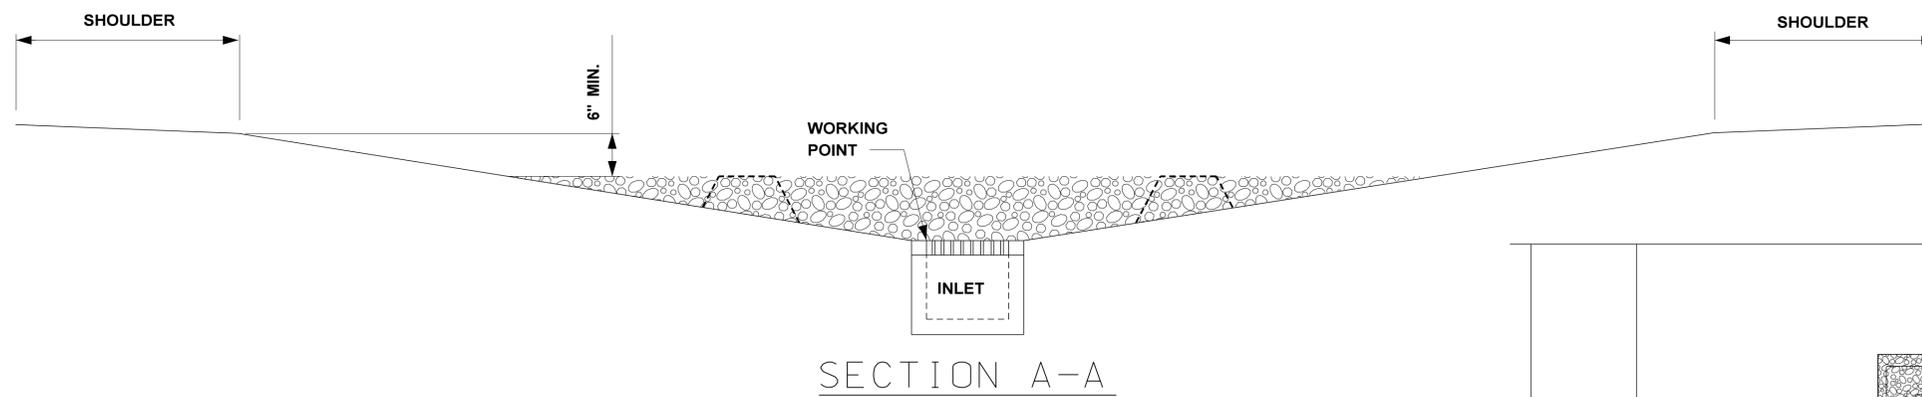

MISSISSIPPI DEPARTMENT OF TRANSPORTATION		PRELIMINARY NOT FOR CONSTRUCTION
INLET PROTECTION DETAILS FOR COARSE AGGREGATE ON GRADES & SAGS		
COUNTY:	WORKING NUMBER	ECD-12
PROJ. NUM.:	SHEET NUMBER	
FILENAME: ECD-12.DGN	DATE	\$PG\$
DESIGN TEAM	CHECKED	DATE 9/29/15

10/5/2015 11:48 AM ECD-12.DGN