


STATE	PROJECT NO.
MISS.	

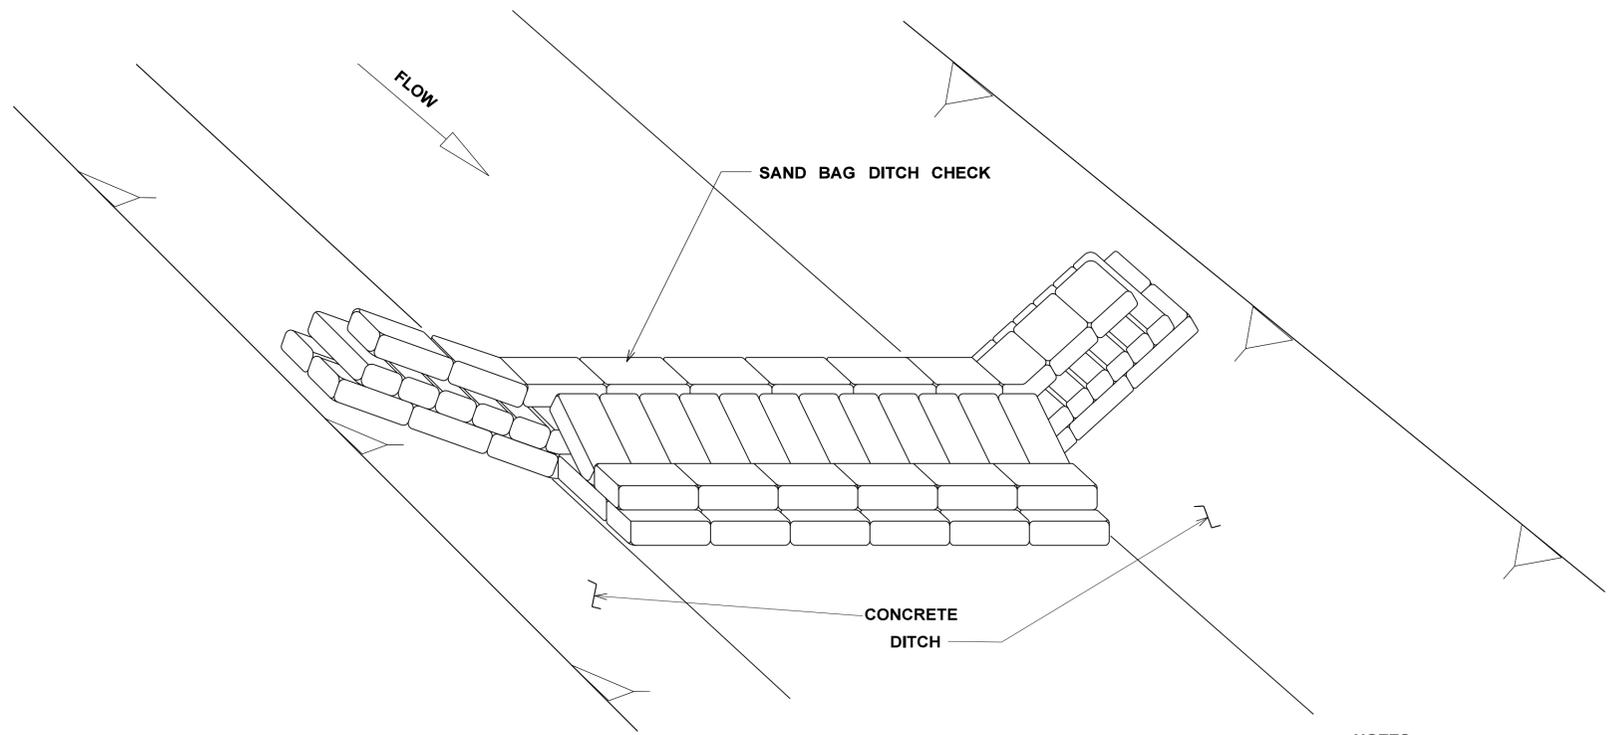

DETAIL (DITCH CHECK)


NOTES:

1. MINIMUM RECOMMENDED PLACEMENT INTERVAL BETWEEN SAND BAG DITCH CHECK IS 100' UNLESS SHOWN OTHERWISE ON THE PLANS OR APPROVED BY THE ENGINEER. SEE SPACING GUIDANCE ON ECD-4.
2. PREVENTING SEDIMENT FROM ENTERING A PAVED DITCH IS PREFERABLE TO CAPTURING SEDIMENT WITHIN PAVED DITCH.

SAND BAG DITCH CHECK SELECTION GUIDELINES

SAND BAG DITCH CHECKS ARE USED FOR VELOCITY REDUCTION AND MINIMAL SEDIMENT TRAPPING IN CONCRETE PAVED DITCHES OR IN DITCHES THAT HAVE ROCKY BOTTOMS.

NOTE: END POINTS "A" MUST BE HIGHER THAN FLOWLINE POINT "B"

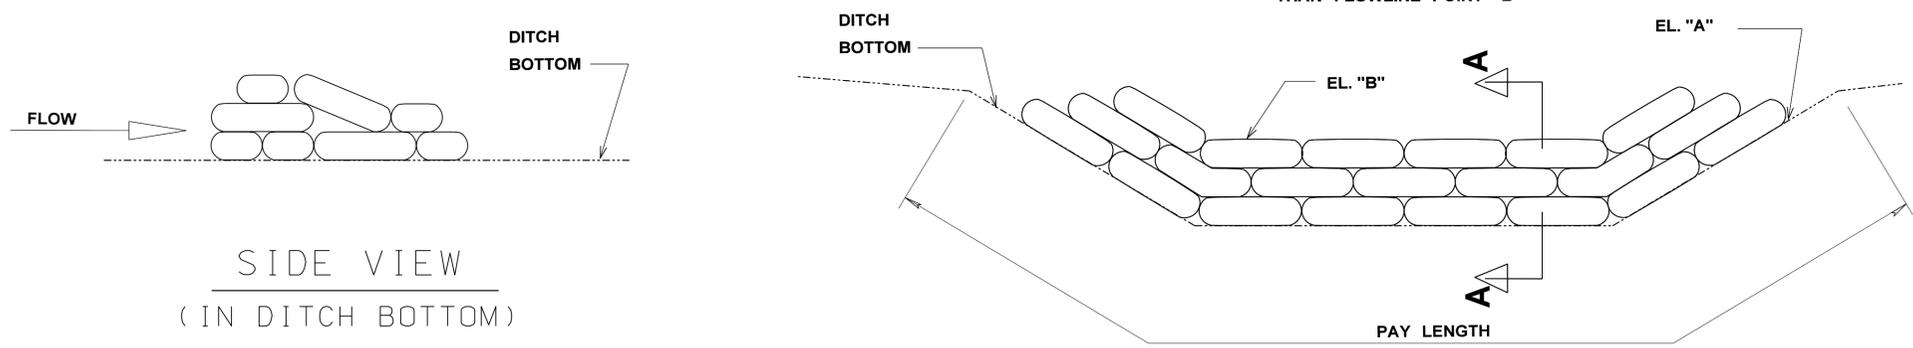

ELEVATION DETAIL

10/5/2015 11:48 AM ECD-21.DGN PLAN DIVISION MISSISSIPPI DEPARTMENT OF TRANSPORTATION

MISSISSIPPI DEPARTMENT OF TRANSPORTATION		PRELIMINARY NOT FOR CONSTRUCTION
DETAILS OF EROSION CONTROL SANDBAG DITCH CHECK		
COUNTY: PROJ. NUM.:		WORKING NUMBER ECD-21
FILENAME: ECD-21.DGN DESIGN TEAM _____ CHECKED _____ DATE 9/29/15		SHEET NUMBER \$PG\$