



STATE	PROJECT NO.
MISS.	

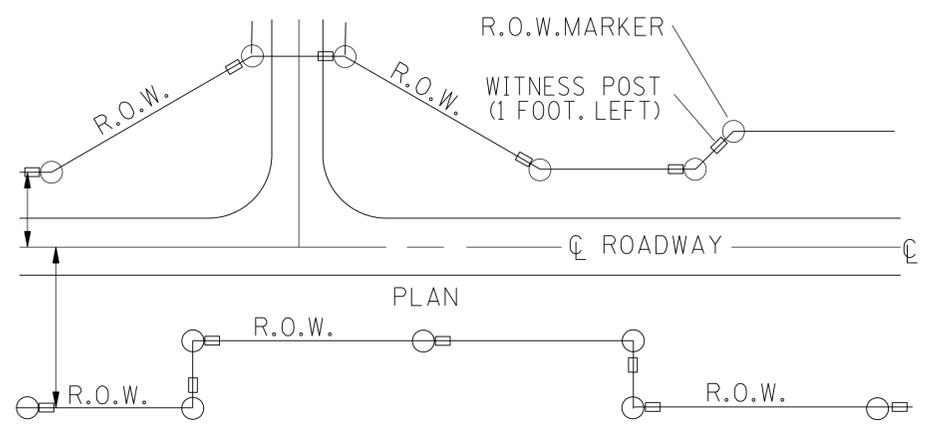

TYPICAL PLACEMENT OF R.O.W. MARKERS AND WITNESS POST


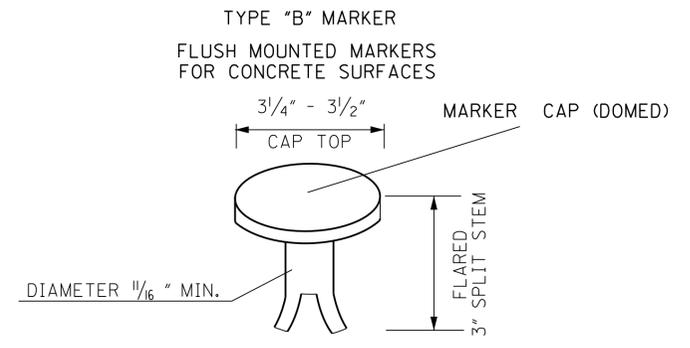


TYPE "B" MARKER
FLUSH MOUNTED MARKERS FOR CONCRETE SURFACES

GENERAL NOTES

THE MARKERS SHALL BE PLACED AS INDICATED ELSEWHERE ON PLANS
COST OF WITNESS POST AND DECALS SHALL BE INCLUDED IN THE COST OF MARKER


SURVEY MARKER WITNESS POST DECALS
WHITE BACKGROUND WITH BLACK PRINT, VINYL WITH ADHESIVE BACKING

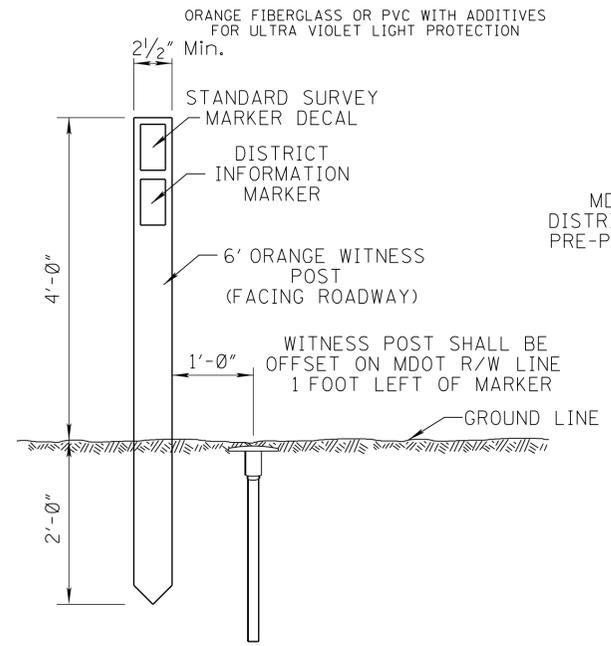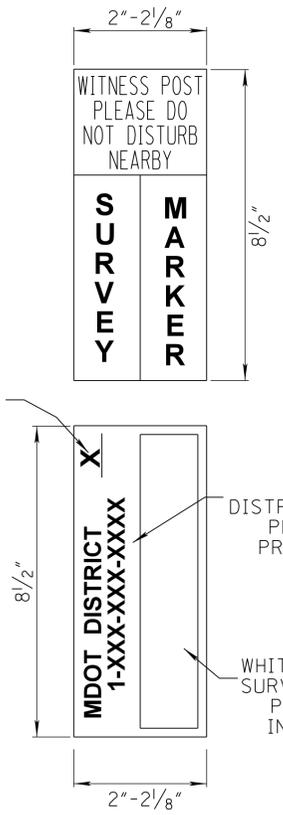

WITNESS POST & RIGHT-OF-WAY MARKER

NOTE: THE MARKER CAP SHALL NOT HAVE A DATUM POINT PRE-STAMPED BY THE MANUFACTURER. THE DATUM POINT SHALL BE PLACED AT THE TIME OF INSTALLATION BY THE PROFESSIONAL SURVEYOR

TOP VIEW

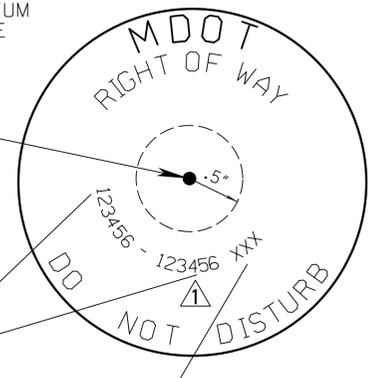

MARKER CAP SPECIFICATIONS PRINT DATA WHERE SHOWN	
3.25" - 3.50" DIAMETER DOMED TOP	
OUTSIDE ROW 46 SPACES "MDOT - DO NOT DISTURB" 3/16" LETTERS	
MIDDLE ROW 35 SPACES "RIGHT OF WAY" 3/16" LETTERS	
INSIDE ROW 35 SPACES "PROJECT R.O.W.# AND INDIVIDUAL MARKER#" 1/8" LETTERS	

DATUM POINT SHALL BE WITHIN 1/2" OF CENTER OF DISK

DEPTH OF PUNCH AND LETTERING IS 1/32"


PROJECT CONSTRUCTION NUMBER SHALL BE PRE-STAMPED.

INDIVIDUAL MARKER NUMBER SHALL BE STAMPED AT THE TIME OF PLACEMENT. THESE NUMBERS SHALL COINCIDE WITH THE R.O.W. MARKER COORDINATE SHEET(S) IN THESE PLANS.

FOR PERMANENT EASEMENT

NOTE: THE MARKER CAP SHALL NOT HAVE A DATUM POINT PRE-STAMPED BY THE MANUFACTURER. THE DATUM POINT SHALL BE PLACED AT THE TIME OF INSTALLATION BY THE PROFESSIONAL SURVEYOR

TOP VIEW

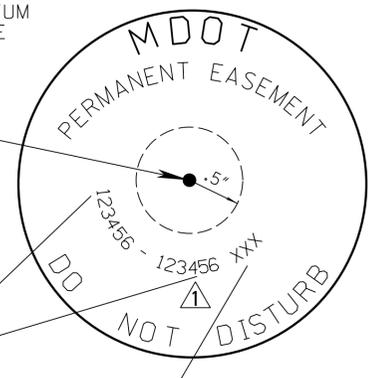


MARKER CAP SPECIFICATIONS PRINT DATA WHERE SHOWN	
3.25" - 3.50" DIAMETER DOMED TOP	
OUTSIDE ROW 46 SPACES "MDOT - DO NOT DISTURB" 3/16" LETTERS	
MIDDLE ROW 35 SPACES "PERMANENT EASEMENT" 3/16" LETTERS	
INSIDE ROW 35 SPACES "PROJECT P.E.# AND INDIVIDUAL MARKER#" 1/8" LETTERS	

DATUM POINT SHALL BE WITHIN 1/2" OF CENTER OF DISK

DEPTH OF PUNCH AND LETTERING IS 1/32"

PROJECT CONSTRUCTION NUMBER SHALL BE PRE-STAMPED.

INDIVIDUAL MARKER NUMBER SHALL BE STAMPED AT THE TIME OF PLACEMENT. THESE NUMBERS SHALL COINCIDE WITH THE P.E. MARKER COORDINATE SHEET(S) IN THESE PLANS.

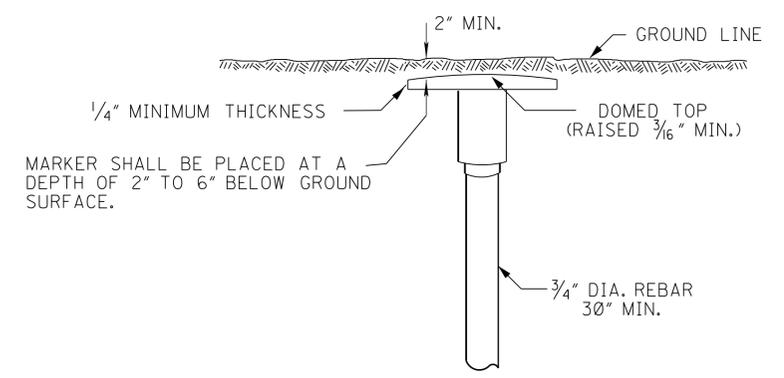

MARKER SHALL BE PLACED AT A DEPTH OF 2" TO 6" BELOW GROUND SURFACE.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION		PRELIMINARY NOT FOR CONSTRUCTION
RIGHT-OF-WAY MARKER		
COUNTY:	PROJ. NO.:	WORKING NUMBER RW-1
FILENAME: PE_MARKER_2.DGN	DATE	SHEET NUMBER \$PG\$
DESIGN TEAM	CHECKED	DATE 10/15/12

3/29/2016 1:01:30:35 PE_MARKER_2.DGN