


**PLAN**  
**(TEMPORARY GUARDRAIL)**  
NOTE: TYPICAL FOR EACH END OF BRIDGE.

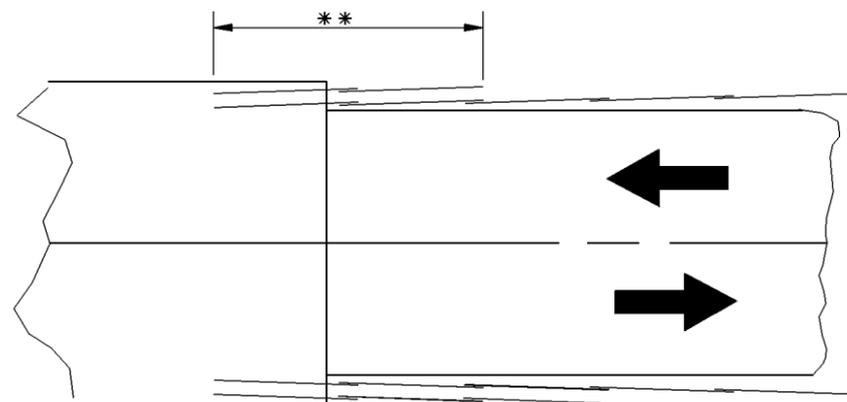

**DETAIL SHOWING GUARDRAIL SECTION LAPS AND OVERLAPS**

**LEGEND**

- \* SINGLE WHITE DELINEATOR REQUIRED (3 REQUIRED PER INSTALLATION)
- \*\* TWO SECTIONS OF GUARDRAIL ONE SET INSIDE THE OTHER.  
(NO EXTRA PAY FOR DOUBLE RAIL)
- ← INDICATES DIRECTION OF TRAFFIC

**GENERAL NOTES:**

1. GUARDRAIL TO BE INSTALLED PRIOR TO PLACEMENT OF TRAFFIC ON DETOUR ROAD.
2. FOR OTHER DETAILS OF GUARDRAIL INSTALLATION, SEE THE APPROPRIATE STANDARD DRAWINGS.
3. OVERLAP GUARDRAIL 10' OVER BRIDGE RAIL. (NOT A SEPARATE PAY ITEM).
4. BOLT GUARDRAIL TO BRIDGE RAIL AS PER STANDARD PLAN (NOT A SEPARATE PAY ITEM).
5. POST SPACING TO BE 6'-3" UNLESS OTHERWISE NOTED OR AS DIRECTED BY THE ENGINEER.
6. FOR DETAILS PERTINENT TO INSTALLATION OF THE TERMINAL SECTION, SEE MANUFACTURER'S SPECIFICATIONS AND DRAWINGS OR ELSEWHERE ON PLANS

D:\projects\standard\2003rev\tgr-imod.dgn 8/9/2005 11:20 AM TGR-1.MDD, DGN

BY		MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
REVISION		<b>GUARDRAIL (TEMPORARY): TYPICAL INSTALLATION AT DETOUR BRIDGE ENDS</b>	
DATE	FILENAME:	DESIGN TEAM	CHECKED
			DATE
WORKING NUMBER		TGR-1	
SHEET NUMBER			